




AUTOMATIC TRANSAXLE UNIT

COMPONENTS

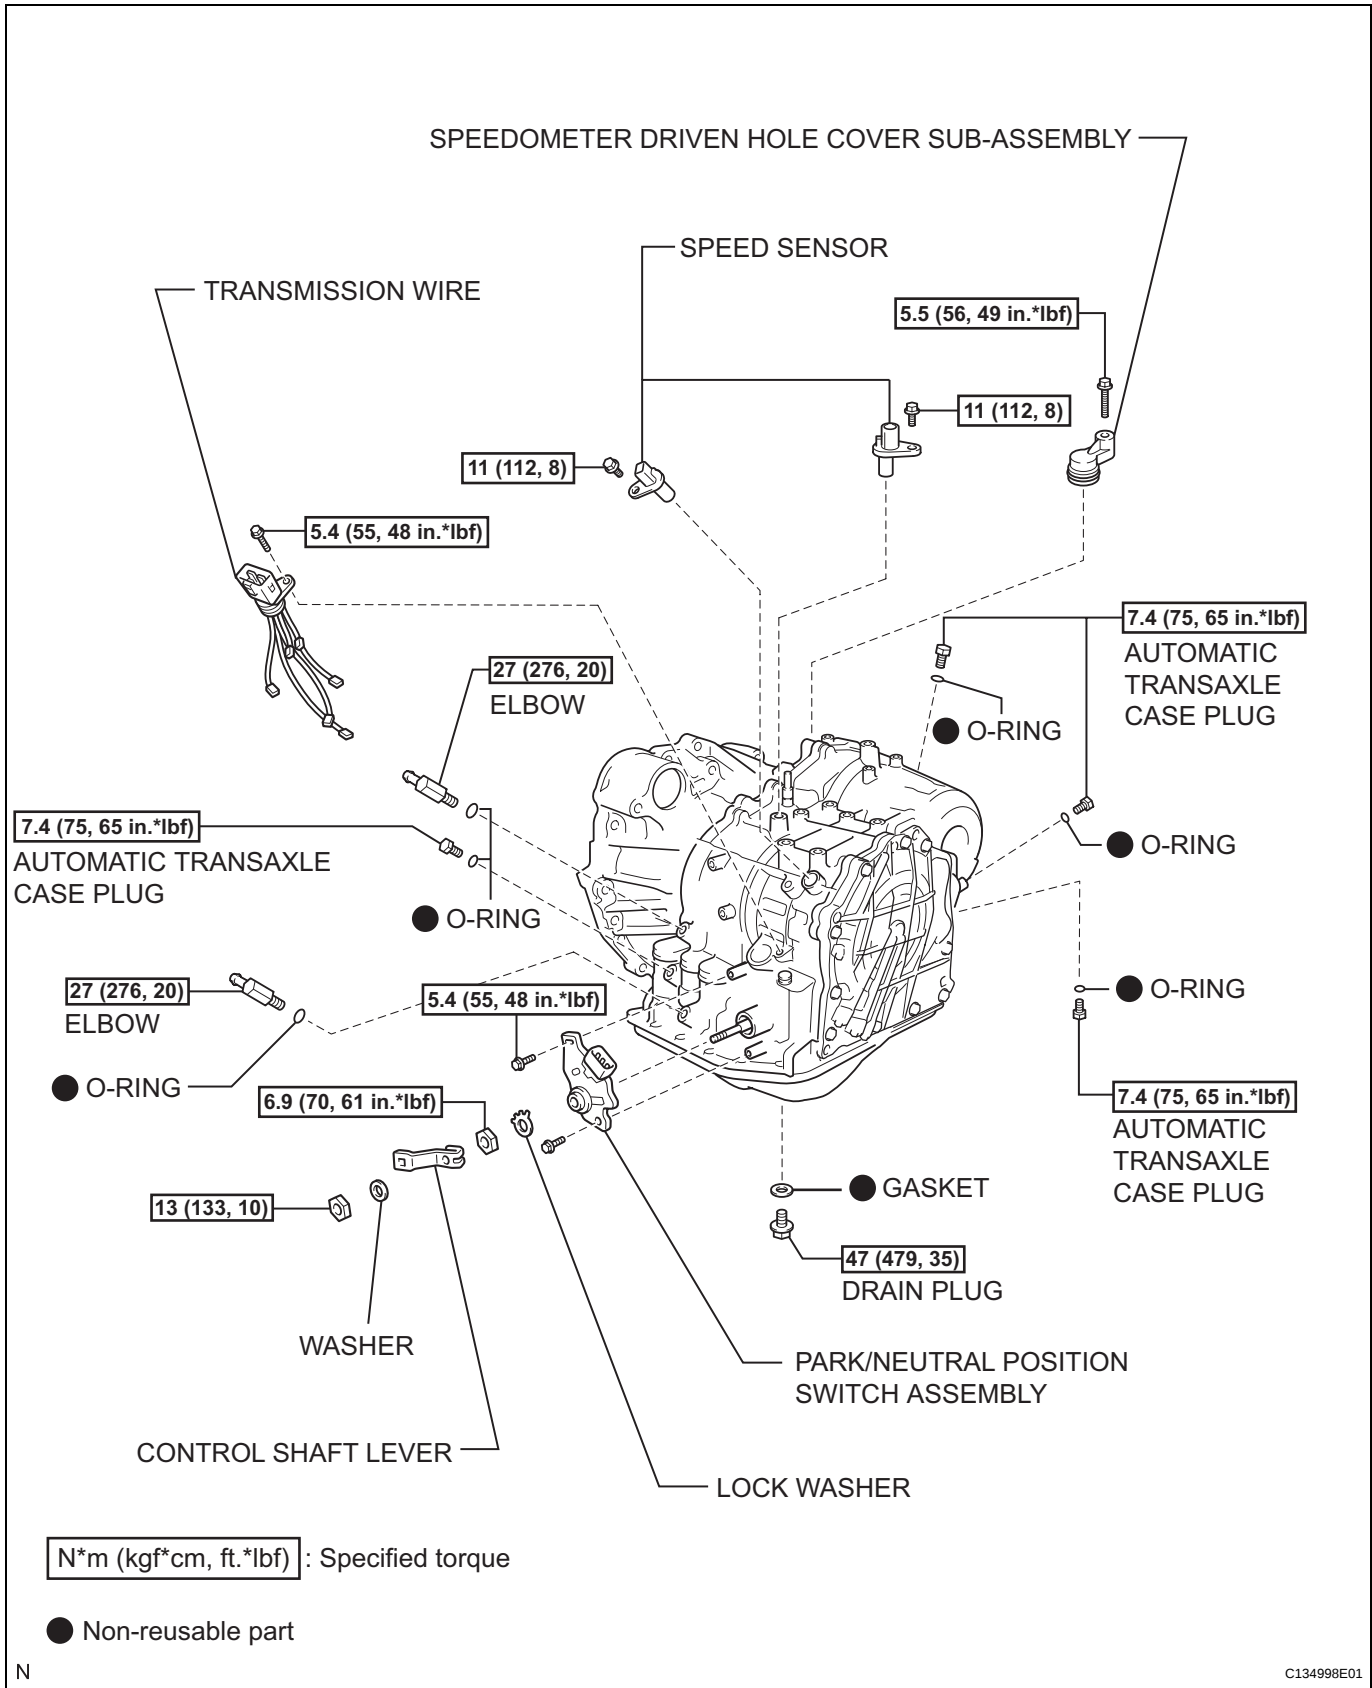



TRANSMISSION VALVE BODY ASSEMBLY

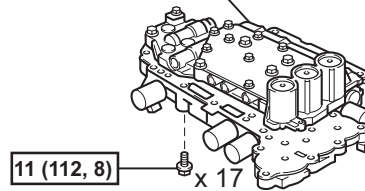


11 (112, 8)

x 17




VALVE BODY OIL STRAINER ASSEMBLY



11 (112, 8)

MAGNET



GASKET

AUTOMATIC TRANSAXLE
OIL PAN SUB-ASSEMBLY


x 18

7.6 (77, 67 in.*lbf)

N*m (kgf*cm, ft.*lbf) : Specified torque

● Non-reusable part

AUTOMATIC TRANSAXLE CASE SUB-ASSEMBLY



MANUAL VALVE LEVER SHAFT RETAINER SPRING

● SPACER

SLOTTED SPRING PIN

MANUAL VALVE LEVER SHAFT

MANUAL VALVE LEVER SHAFT OIL SEAL

PARKING LOCK ROD SUB-ASSEMBLY



PARKING LOCK PAWL BRACKET

20 (205, 15)

MANUAL DETENT SPRING SUB-ASSEMBLY

20 (205, 15)

11.8 (120, 9)

SPRING

CHECK BALL BODY

C-3 ACCUMULATOR PISTON

● O-RING

COMPRESSION SPRING

B-3 ACCUMULATOR PISTON

● O-RING

COMPRESSION SPRING

REVERSE CLUTCH ACCUMULATOR PISTON

COMPRESSION SPRING


N*m (kgf*cm, ft.*lbf) : Specified torque

● Non-reusable part

AX

N

C135000E01

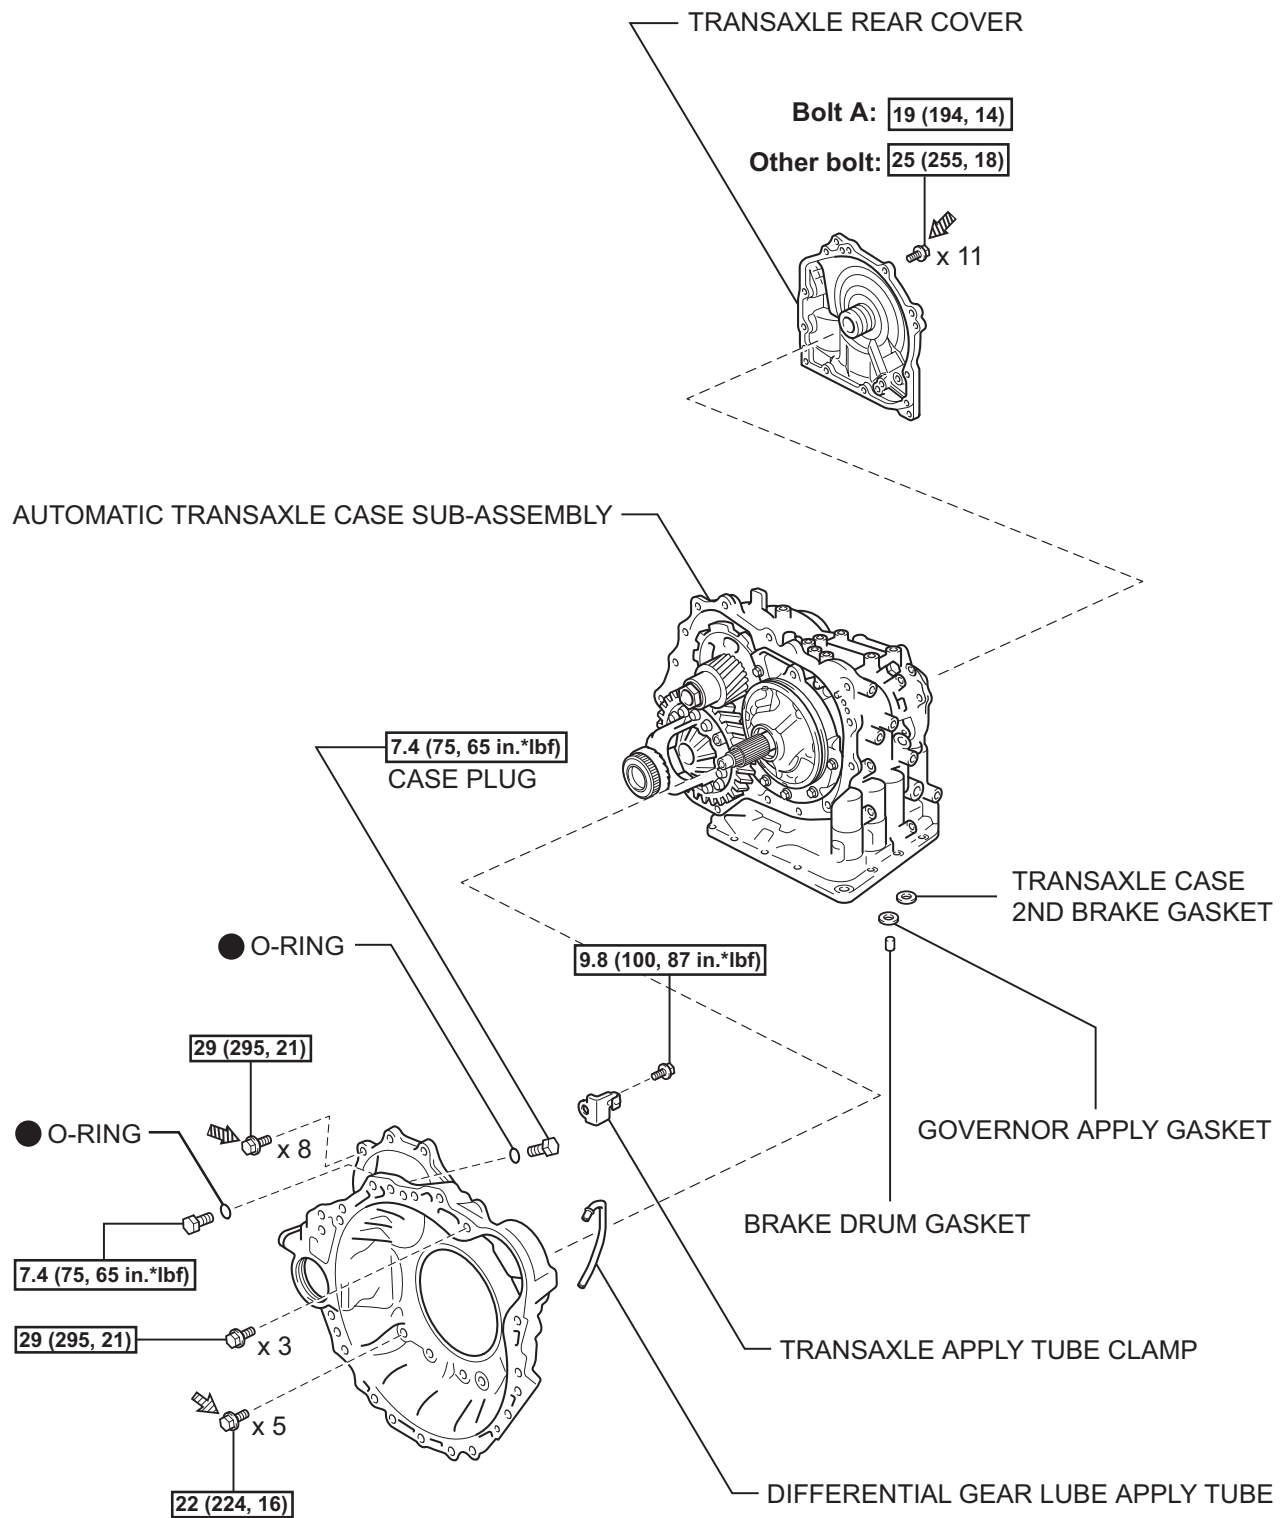


N*m (kgf*cm, ft.*lbf) : Specified torque

● Non-reusable part


◀ Precoated part


AX

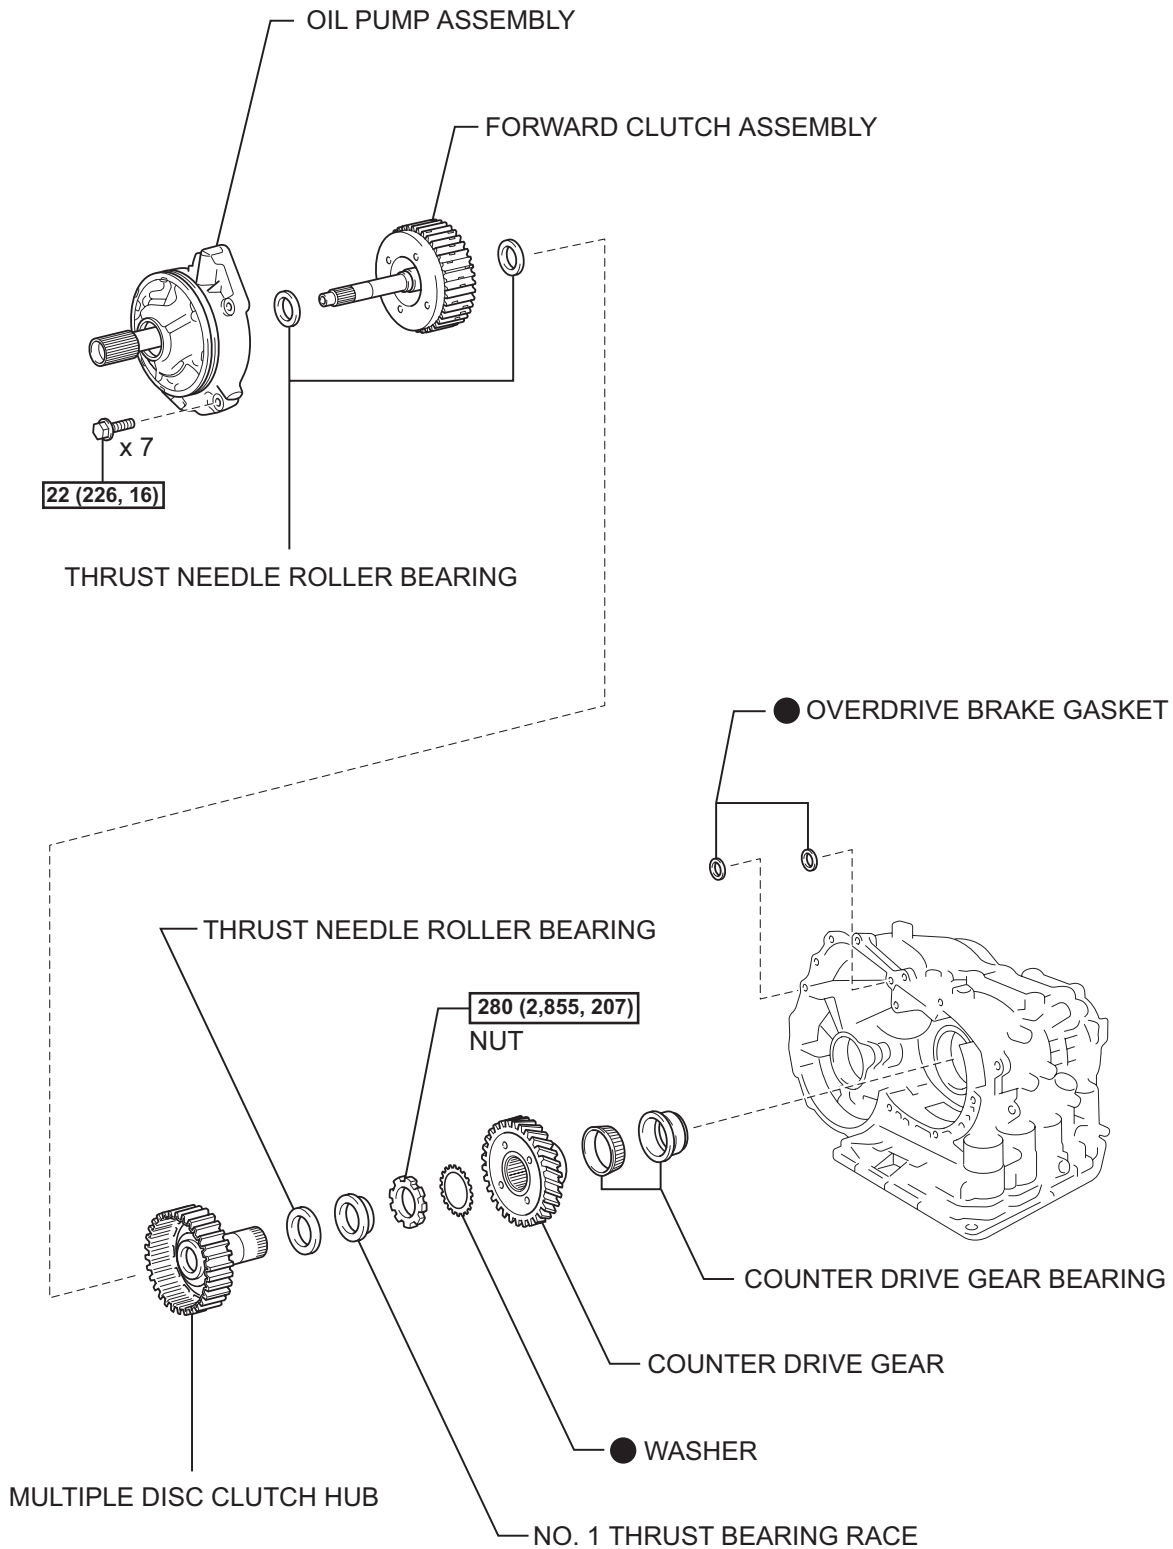


N*m (kgf*cm, ft.*lbf) : Specified torque

● Non-reusable part

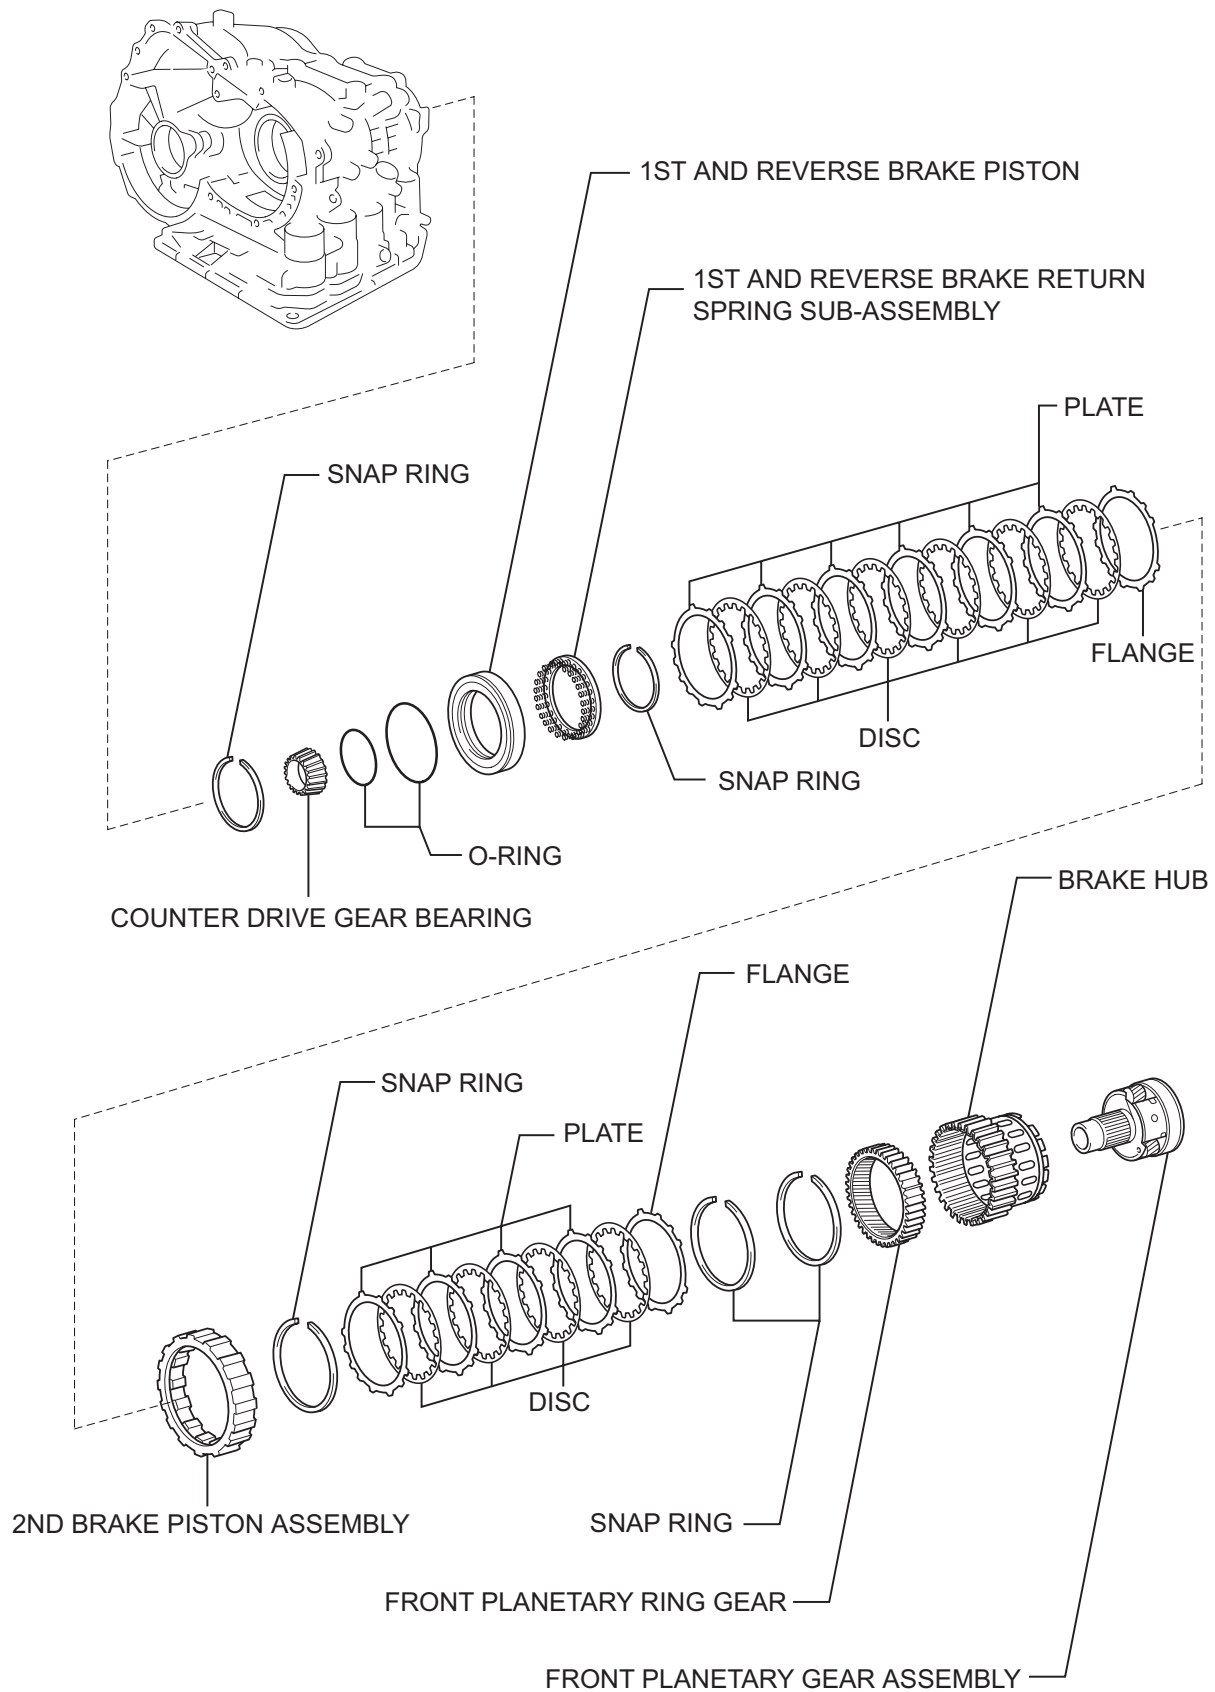


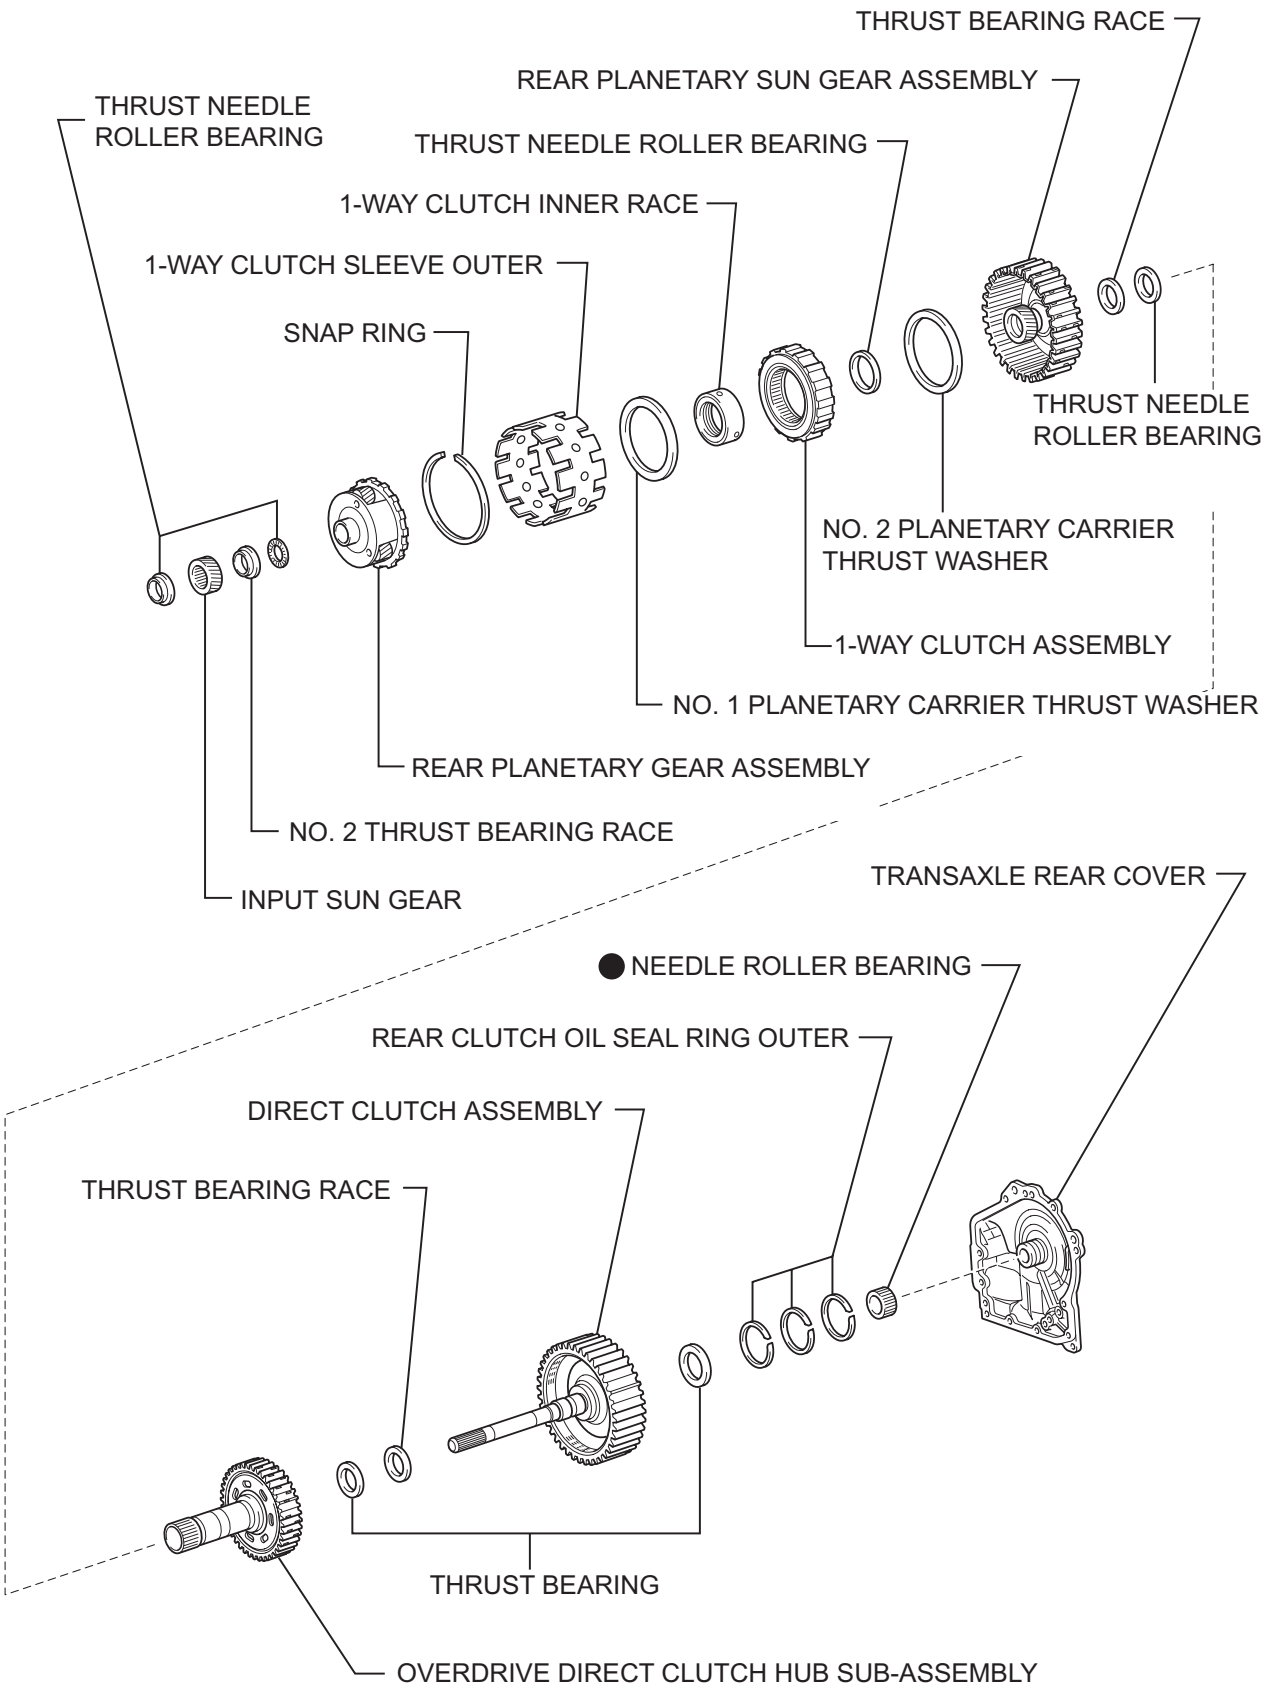

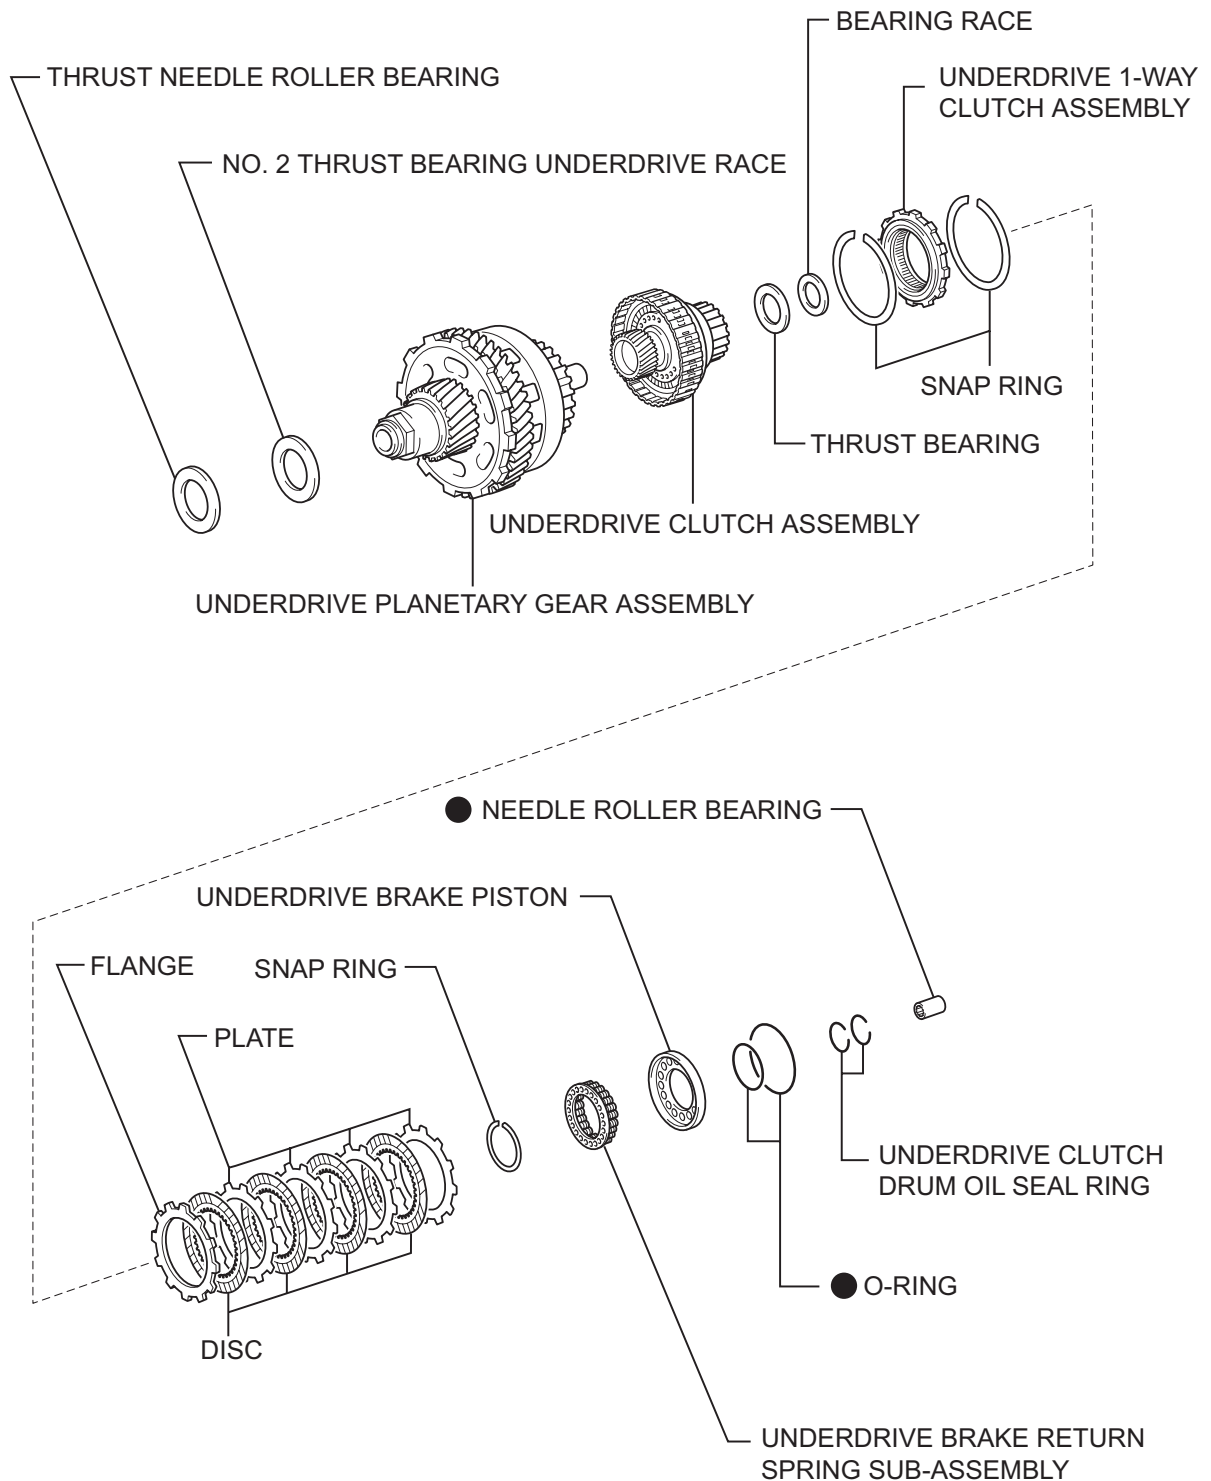

● Non-reusable part

AX

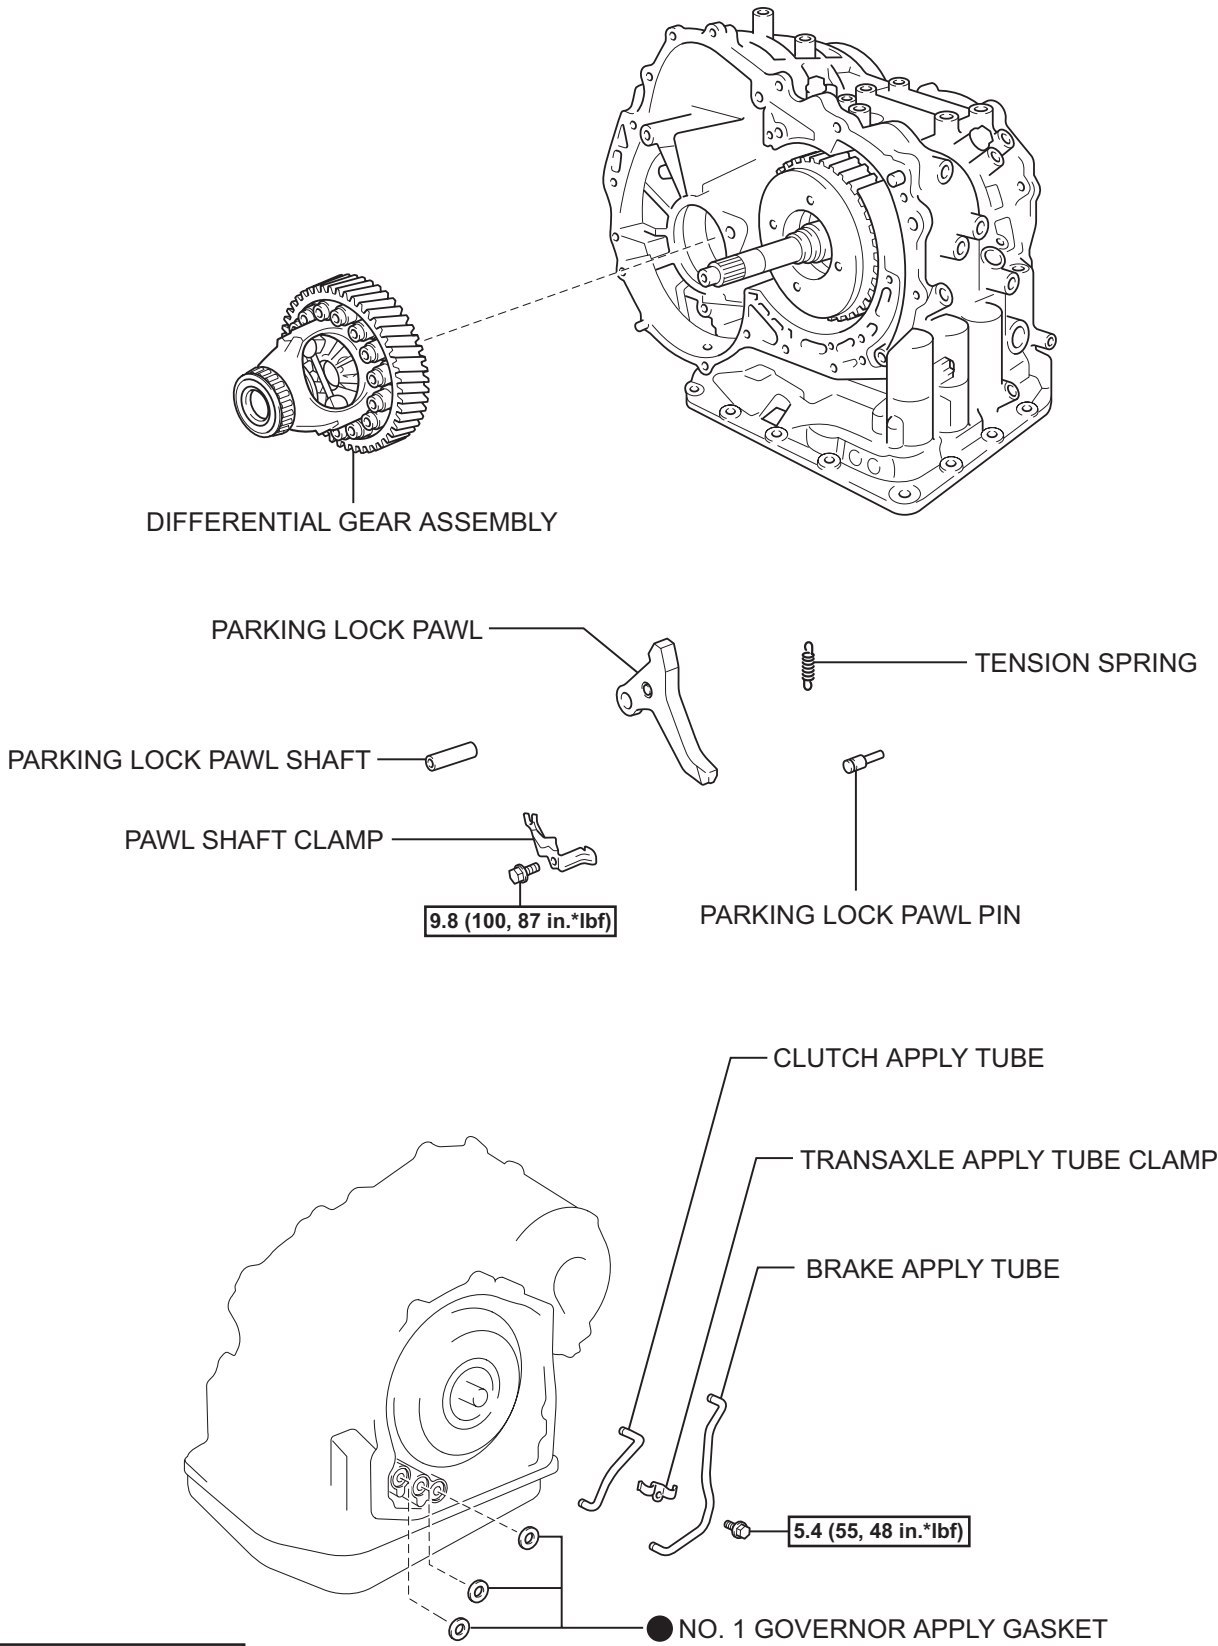

N*m (kgf*cm, ft.*lbf) : Specified torque

● Non-reusable part