


Multiplex Communication System – CAN

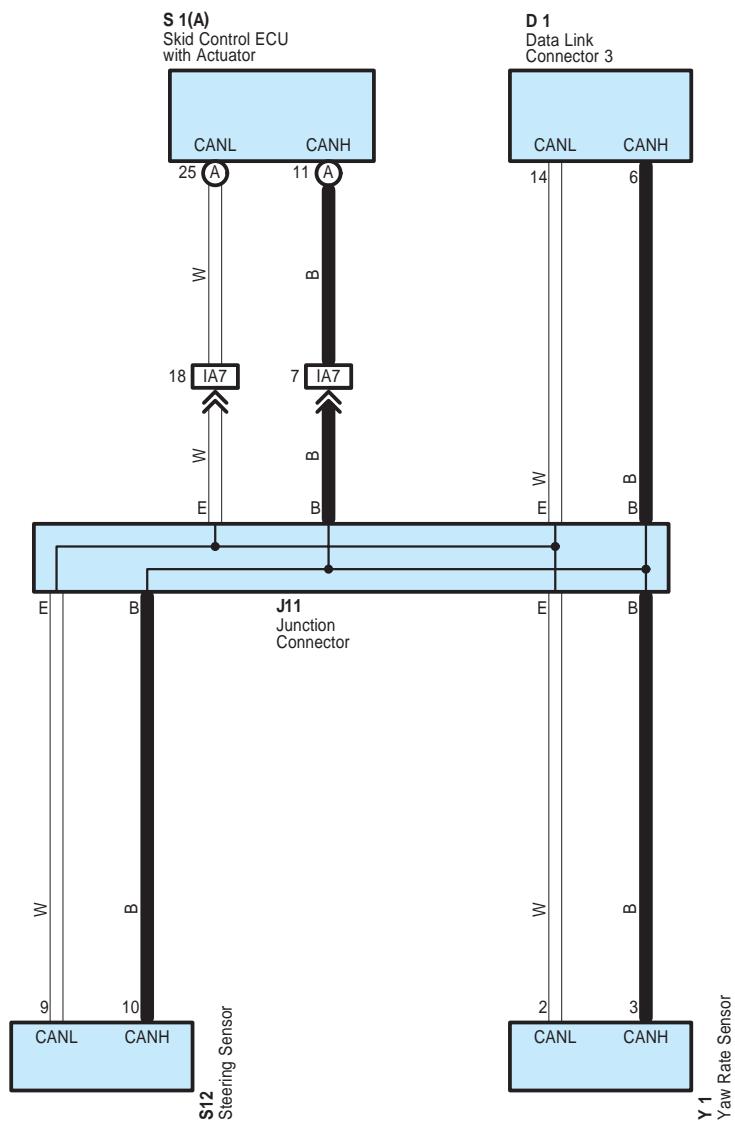

System Outline

Multiplex communication system (CAN) uses a serial communication protocol and communicates with a differential voltage. In this network system, TERMINALS CANH and CANL are used for communication between the ECUs and sensors, and excellent data communication speed and communication error detecting facility are provided.

This system is working for the following systems:

- * ABS (w/ VSC)
- * TRAC
- * VSC

: Parts Location

Code	See Page	Code	See Page	Code	See Page
D1	36	S1	33 (1ZZ-FE)	S12	37
J11	37		35 (2ZZ-GE)	Y1	37

: Connector Joining Wire Harness and Wire Harness

Code	See Page	Joining Wire Harness and Wire Harness (Connector Location)
IA7	44	Engine Room Main Wire and Instrument Panel Wire (Left Side of the Instrument Panel Reinforcement)