


# 十六、喇叭

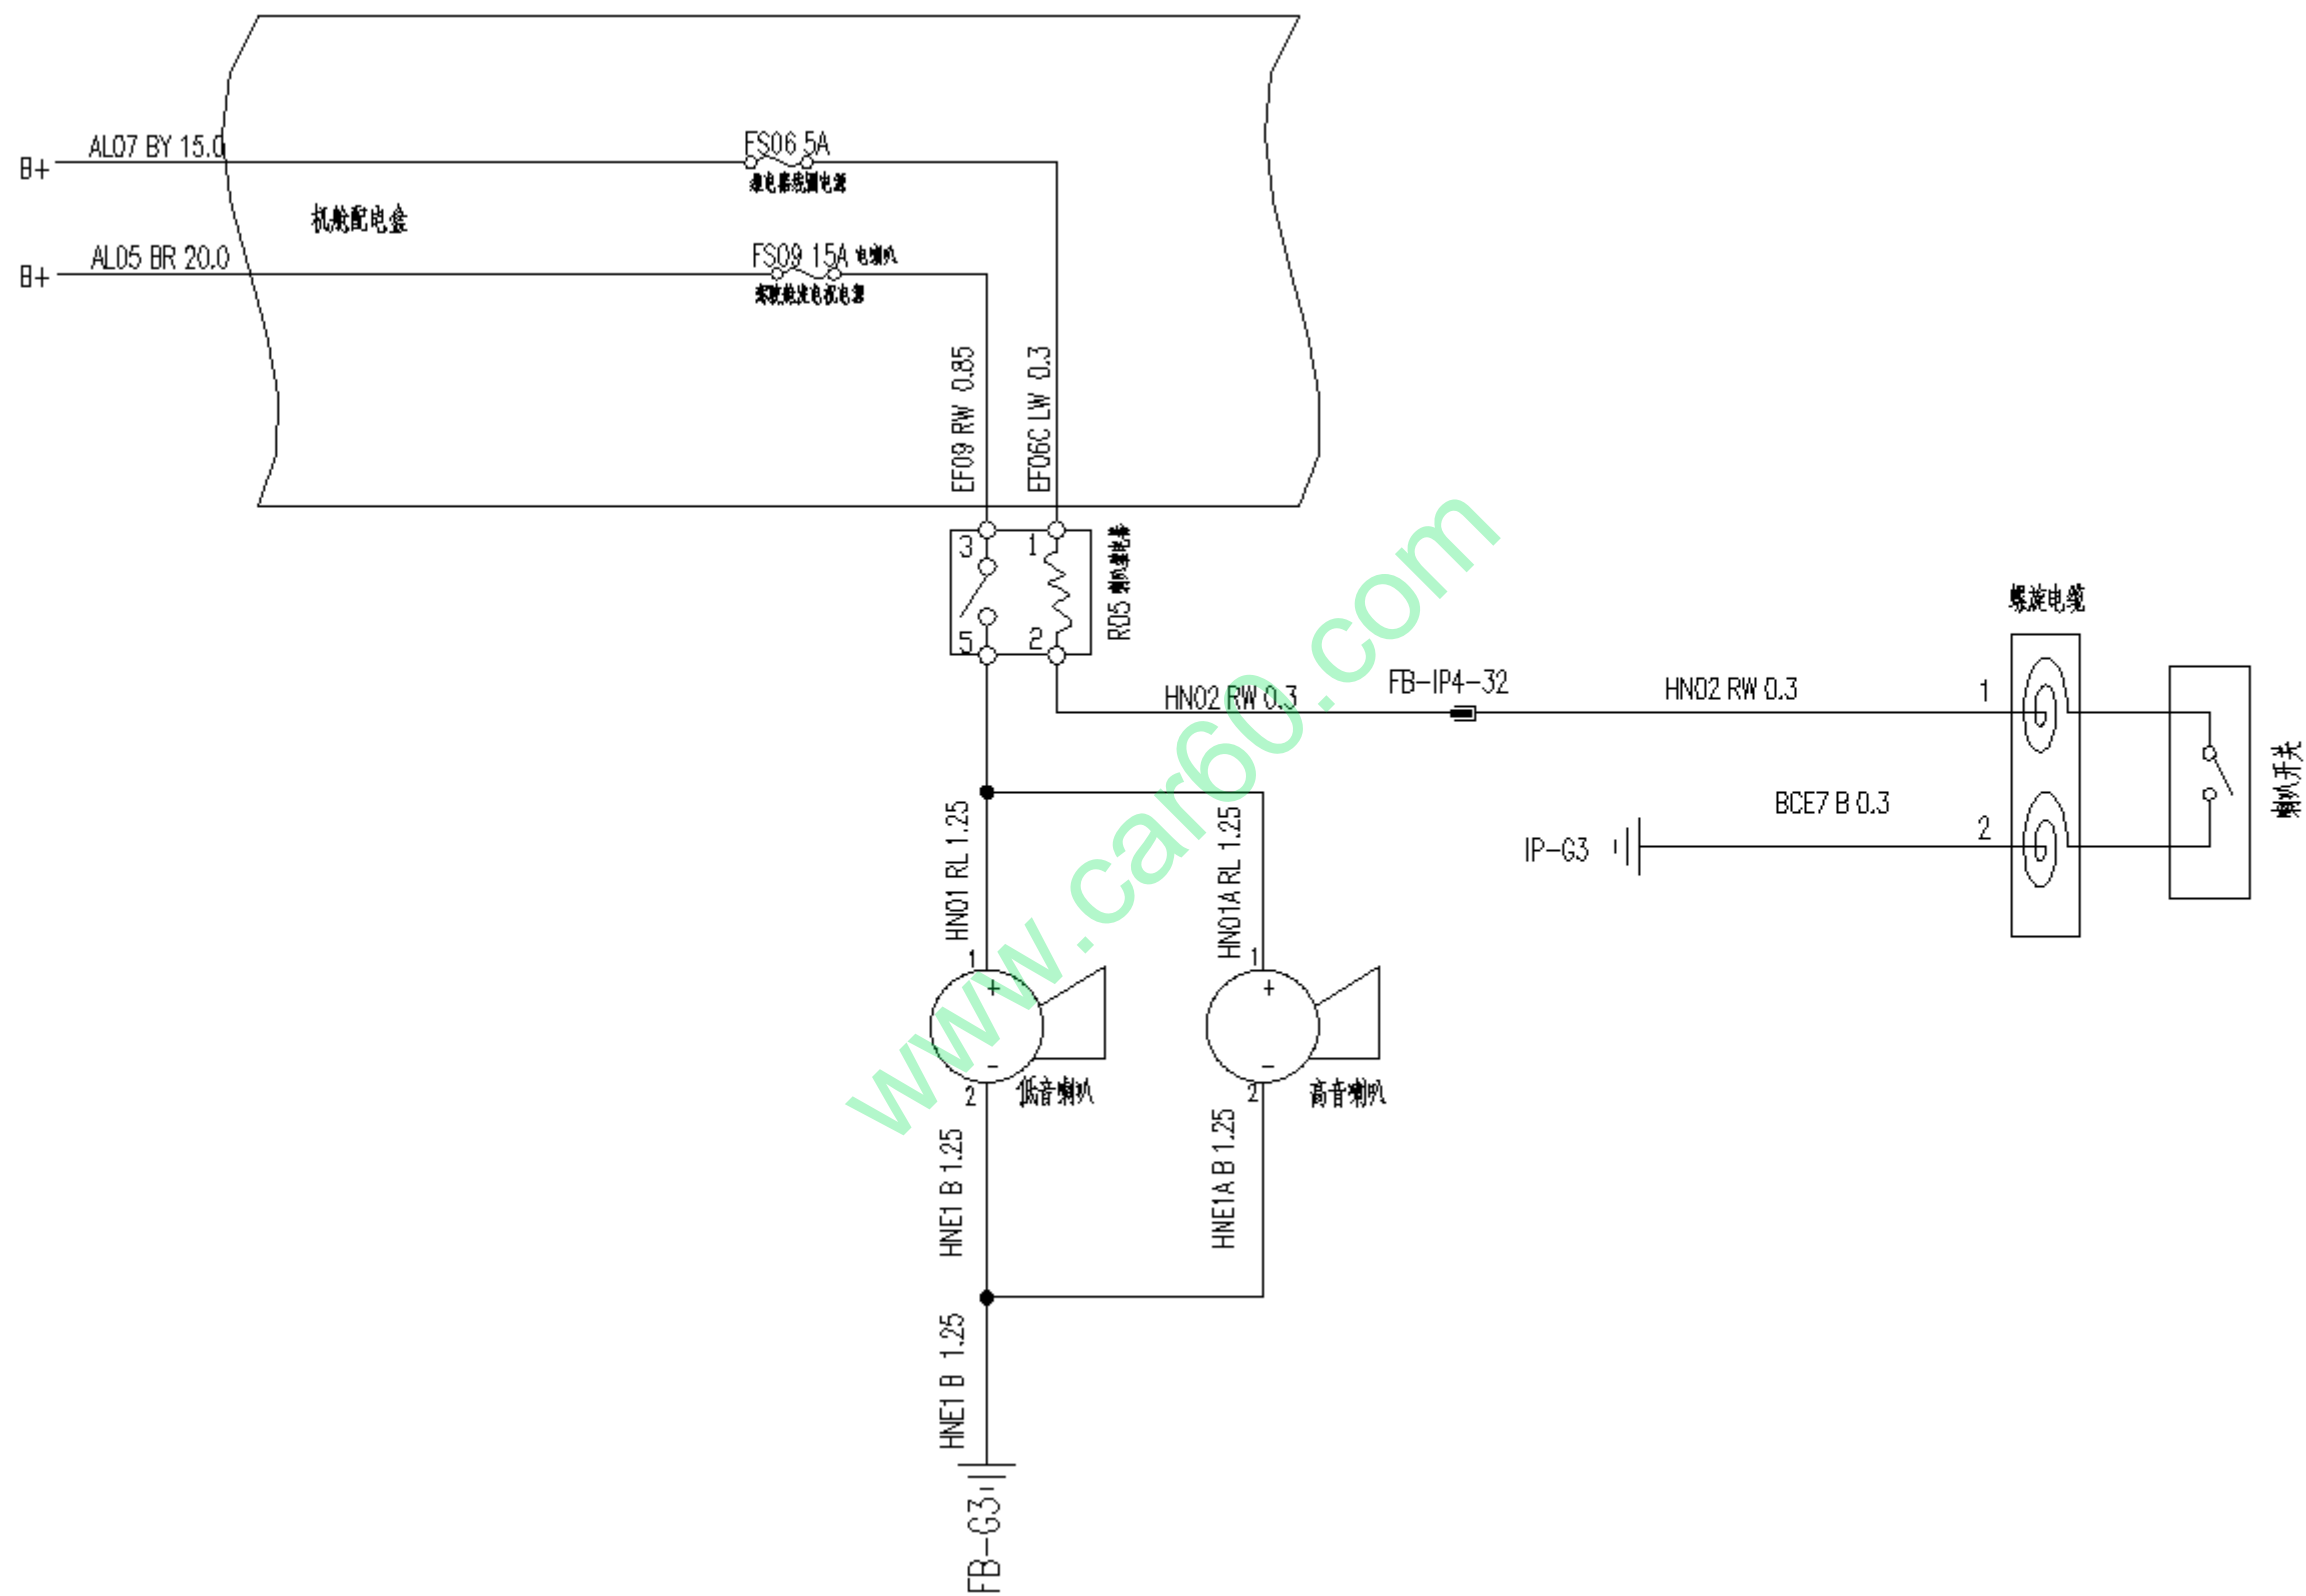

线束端接插件型号TYCO:1318774-1

接螺旋电缆

|                   |                   |                    |                   |                   |                    |
|-------------------|-------------------|--------------------|-------------------|-------------------|--------------------|
| 6                 |                   |                    |                   |                   | 1                  |
| VC28<br>BY<br>0.3 | VC27<br>GW<br>0.5 | AD09B<br>BR<br>0.3 | AD52<br>WR<br>0.3 | BCE7<br>B<br>0.3  | HN02<br>RW<br>0.3  |
| IP17<br>W<br>0.3  | IP16<br>GR<br>0.3 | AD09A<br>BR<br>0.3 | AD03<br>Y<br>0.3  | BCE7B<br>B<br>0.3 | PL01m<br>LW<br>0.3 |
| 12                |                   |                    |                   |                   | 7                  |

|    |        |
|----|--------|
| 1  | 喇叭控制线  |
| 2  | 喇叭接地线  |
| 3  | 蓝牙主机电源 |
| 4  | 蓝牙主机地  |
| 5  | ECU信号  |
| 6  | ECU地   |
| 7  | 背景灯电源  |
| 8  | 背景灯地   |
| 9  | 音响主机电源 |
| 10 | 音响主机地  |
| 11 | 仪表电源   |
| 12 | 仪表地    |

HN01A  
RL  
1.25  
(带防水胶套)  
AMP:174090-2  
接高音电喇叭正 FB12

HNE1A  
B  
1.25  
(带防水胶套)  
AMP:174090-2  
接高音电喇叭负 FB26

HN01  
RL  
1.25  
(带防水胶套)  
AMP:174090-2  
接低音电喇叭正 FB11

HNE1  
B  
1.25  
(带防水胶套)  
AMP:174090-2  
接低音电喇叭负 FB25

|                    |                    |                 |   |
|--------------------|--------------------|-----------------|---|
| R05                | 喇叭继电器              | HN02<br>RW 0.3  | 2 |
| EF09<br>RW<br>1.25 | HN01<br>RL<br>1.25 |                 |   |
| 3                  | 5                  | EF06C<br>LW 0.3 | 1 |

|                   |         |  |
|-------------------|---------|--|
| EF06<br>LW<br>0.3 | FS06 5A |  |
|-------------------|---------|--|

|                    |          |  |
|--------------------|----------|--|
| EF09<br>RW<br>1.25 | FS09 15A |  |
|--------------------|----------|--|

AMP:1-2298645-2(白)

接仪表线束 FB-IP4

|                   |                   |                   |                    |                   |                   |                   |                   |    |  |  |  |  |  |  |  |  |    |
|-------------------|-------------------|-------------------|--------------------|-------------------|-------------------|-------------------|-------------------|----|--|--|--|--|--|--|--|--|----|
| 17                |                   |                   |                    |                   |                   |                   |                   | 24 |  |  |  |  |  |  |  |  | 8  |
| AV17<br>LR<br>0.5 | VC120<br>G<br>0.5 | AV36<br>GB<br>0.5 | AV37<br>G<br>0.5   | AV16<br>P<br>0.5  | VC28<br>BY<br>0.5 | VC27<br>GW<br>0.5 | HL96<br>YL<br>0.3 |    |  |  |  |  |  |  |  |  |    |
| HN02<br>RW<br>0.3 | HL12<br>RB<br>0.3 | HL11<br>RY<br>0.3 | VC101<br>Br<br>0.5 | VC121<br>Y<br>0.5 | VC116<br>L<br>0.5 | VC79<br>WG<br>0.5 | VCE1D<br>B<br>0.5 |    |  |  |  |  |  |  |  |  |    |
| 32                |                   |                   |                    |                   |                   |                   |                   | 25 |  |  |  |  |  |  |  |  |    |
| 1                 |                   |                   |                    |                   |                   |                   |                   |    |  |  |  |  |  |  |  |  |    |
| IP02<br>YG<br>0.3 | VS08<br>R<br>0.5  | IK08<br>V<br>0.5  | IK07<br>G<br>0.5   | RV12<br>RW<br>0.5 | FL11<br>RG<br>0.3 | VC29<br>GB<br>0.5 | VC09<br>GY<br>0.5 |    |  |  |  |  |  |  |  |  |    |
| CNHC<br>GW<br>0.5 | CNLC<br>YL<br>0.5 | AC01<br>GW<br>0.5 | AC29<br>Gr<br>0.3  | AC08<br>B<br>0.3  | VS03<br>RB<br>0.3 | AC60<br>Lg<br>0.3 | VC90<br>YG<br>0.5 |    |  |  |  |  |  |  |  |  |    |
| 9                 |                   |                   |                    |                   |                   |                   |                   |    |  |  |  |  |  |  |  |  | 16 |