


# EPS SYSTEM




## EPS SYSTEM

Connector No.	E106
Connector Name	WIRE TO WIRE
Connector Type	L02FB-MC
Connector Color	Black

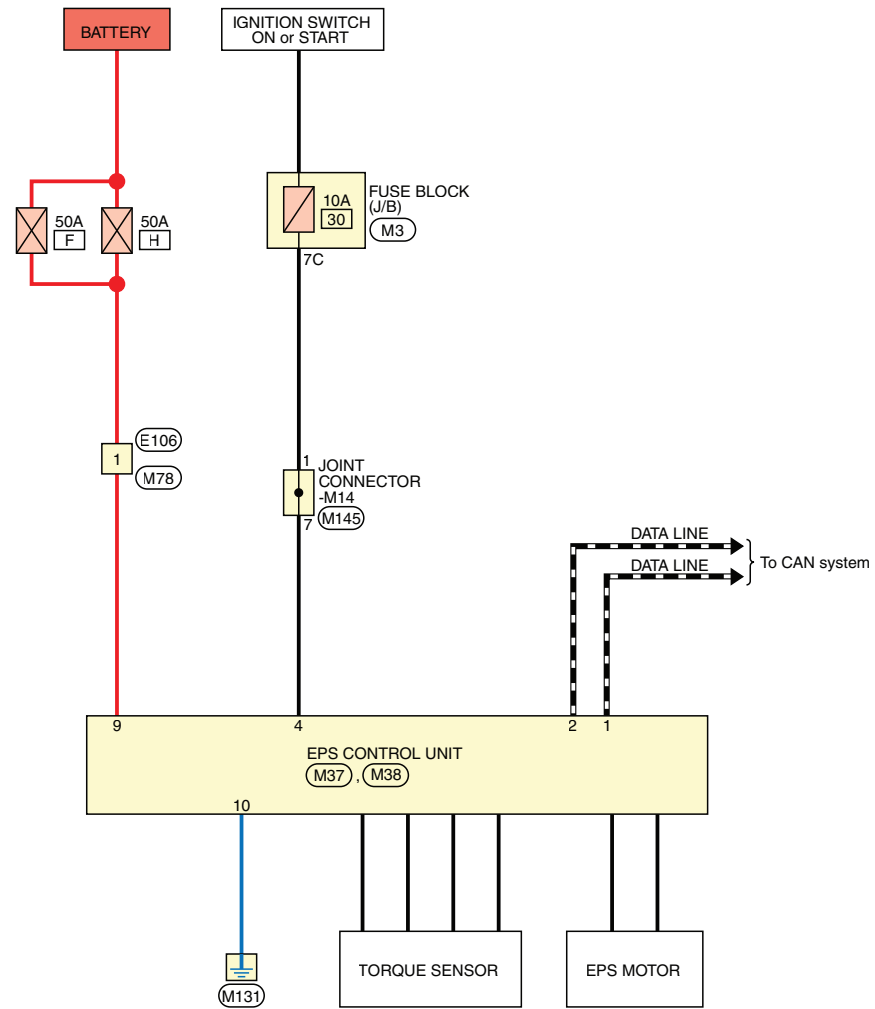


Terminal No.	Color Of Wire	Signal Name [Specification]
1	R	TO MAIN HARNESS
2	W	TO MAIN HARNESS

Connector No.	M37
Connector Name	EPS CONTROL UNIT
Connector Type	TH08FW-NH
Connector Color	White




Terminal No.	Color Of Wire	Signal Name [Specification]
1	R	VEHICLE CAN-L
2	L	VEHICLE CAN-H
4	SB	IGNITION POWER SUPPLY

Connector No.	M78
Connector Name	WIRE TO WIRE
Connector Type	L02MB-MC
Connector Color	Black




Terminal No.	Color Of Wire	Signal Name [Specification]
1	R	TO ENGINE ROOM HARNESS
2	W	TO ENGINE ROOM HARNESS

Connector No.	M3
Connector Name	FUSE BLOCK (J/B)
Connector Type	NS16FW-CS
Connector Color	White




Terminal No.	Color Of Wire	Signal Name [Specification]
10C	LG	-
13C	LA/G	-
14C	LG	-
15C	L	-
16C	LA/W	-
1C	R	-
2C	G	-
3C	LA/Y	-
4C	LG	-
5C	GR	-
6C	LA/R	-
7C	Y	-
8C	BR	- [Color of wire varies depending on production]
8C	LA/BR	- [Color of wire varies depending on production]
9C	L	-

Connector No.	M38
Connector Name	EPS CONTROL UNIT
Connector Type	L02FB-MC
Connector Color	Black



Terminal No.	Color Of Wire	Signal Name [Specification]
9	R	BATTERY POWER SUPPLY
10	B	GROUND

Connector No.	M145
Connector Name	JOINT CONNECTOR-M14
Connector Type	SAC08JW
Connector Color	-



Terminal No.	Color Of Wire	Signal Name [Specification]
1	SB	-
2	SB	-
3	Y	-
4	SB	-
5	SB	-
6	SB	-
7	SB	-
8	SB	-