


等级	螺栓尺寸	螺栓直径* mm	螺距 mm	拧紧力矩 (不带润滑剂)							
				六角头螺栓				六角突缘螺栓			
				N·m	Kg·m	Ft·lb	In·lb	N·m	Kg·m	Ft·lb	In·lb
4T	M6	6.0	1.0	5.1	0.52	3.8	45.1	6.1	0.62	4.5	53.8
	M8	8.0	1.25	13	1.3	9	-	15	1.5	11	-
			1.0	13	1.3	9	-	16	1.6	12	-
	M10	10.0	1.5	25	2.5	18	-	29	3.0	22	-
			1.25	25	2.6	19	-	30	3.1	22	-
	M12	12.0	1.75	42	4.3	31	-	51	5.2	38	-
1.25			46	4.7	34	-	56	5.7	41	-	
M14	14.0	1.5	74	7.5	54	-	88	9.0	65	-	
7T	M6	6.0	1.0	8.4	0.86	6.2	74.6	10	1.0	7	87
	M8	8.0	1.25	21	2.1	15	-	25	2.5	18	-
			1.0	22	2.2	16	-	26	2.7	20	-
	M10	10.0	1.5	41	4.2	30	-	48	4.9	35	-
			1.25	43	4.4	32	-	51	5.2	38	-
	M12	12.0	1.75	71	7.2	52	-	84	8.0	62	-
1.25			77	7.9	57	-	92	9.4	68	-	
M14	14.0	1.5	127	13.0	94	-	147	15.0	108	-	
9T	M6	6.0	1.0	12	1.2	9	-	15	1.5	11	-
	M8	8.0	1.25	29	3.0	22	-	35	3.6	26	-
			1.0	31	3.2	23	-	37	3.8	27	-
	M10	10.0	1.5	59	6.0	43	-	70	7.1	51	-
			1.25	62	6.3	46	-	74	7.5	54	-
	M12	12.0	1.75	98	10.0	72	-	118	12.0	87	-
1.25			108	11.0	80	-	137	14.0	101	-	
M14	14.0	1.5	177	18.0	130	-	206	21.0	152	-	

1. 专用零件不包括在内。
2. 此标准适用于螺栓头印有下述标记的螺栓。

*: 标称直径

类别	标号
4T.....	4
7T.....	7
9T.....	9

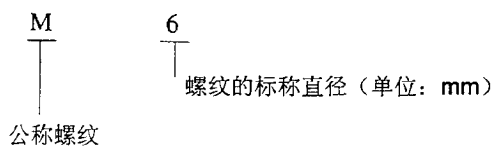

GI
MA
EM
LC
EC
FE
CL
MT
AT
TF
PD
FA
RA
BR
ST
RS
BT
HA
EL
IDX